

Pushbutton sensor 4 24 V, 1-gang

Order no.: 5051 ..

Pushbutton sensor 4 24 V, 2-gang

Order no.: 5052 ..

Pushbutton sensor 4 24 V, 4-gang

Order no.: 5054 ..

Operating instructions

1 Safety instructions



Electrical devices may only be mounted and connected by electrically skilled persons.

Serious injuries, fire or property damage possible. Please read and follow manual fully.

Danger of electric shock. During installation and cable routing, comply with the regulations and standards which apply for SELV circuits.

These instructions are an integral part of the product, and must remain with the end customer.

2 Device components

Front view (Figure 1)

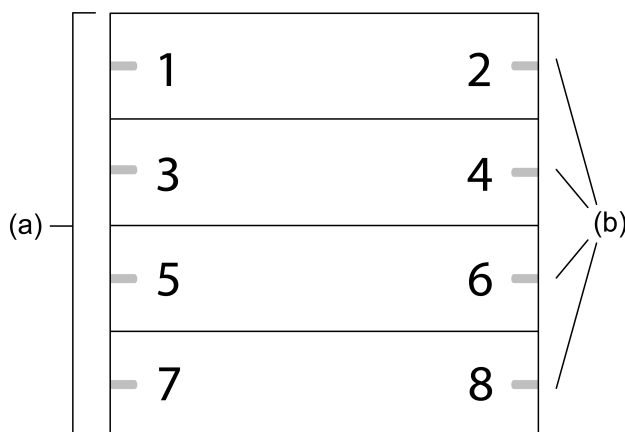


Figure 1: Device components 4-channel

- (a) Operating rockers
- (b) Status LED
- 1...8 Push-buttons assignment and status LED

Exploded view (Figure 2)

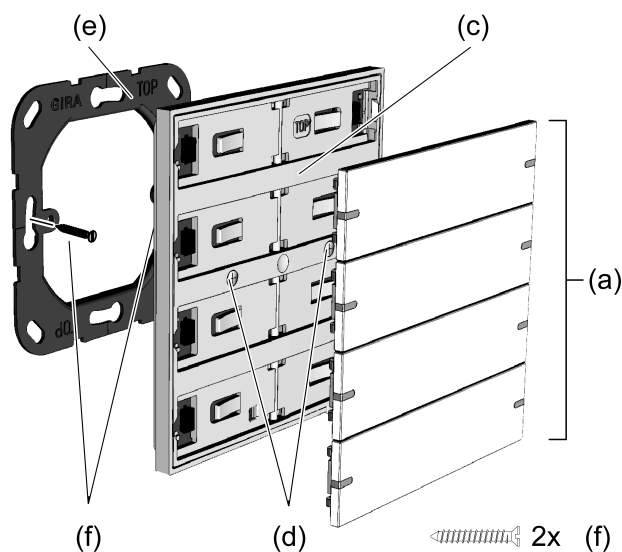


Figure 2: Fitting the device

- (c) Push-button sensor
- (d) Locking screws
- (e) Supporting frame
- (f) Box screws

3 Intended use

- Connection to SELV control systems
- Installation in appliance box according to DIN 49073

4 Product characteristics

- Functions: switching, push-button control, dimming, blind control in conjunction with control systems.
- Two status LEDs per rocker, white
- Room temperature measurement using temperature sensor (PT1000)

5 Information for electrically skilled persons



DANGER!

Mortal danger of electric shock.

Cover up live parts in the installation environment.

Mounting and connecting the device (Figure 2), (Figure 3)

- i** The device should be used in an air-tight appliance box. Otherwise temperature measurements can be negatively influenced by draughts.
- Mount supporting frame (e) in the right orientation on an appliance box.
- i** Note the **TOP** marking.
- i** Use the enclosed box screws (f).

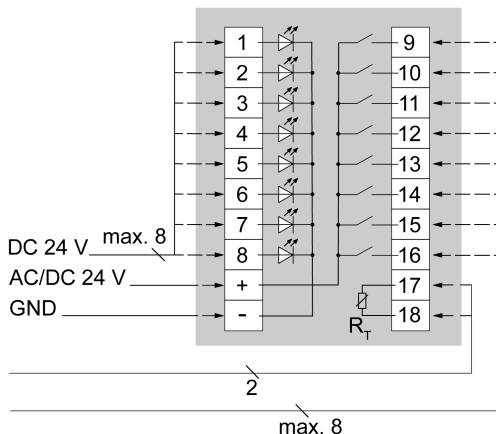


Figure 3: Connection of 4-gang push-button sensor

Connection assignment

Terminal	1-gang	2-gang	4-gang
1	LED 1 (left)	LED 1 (left)	LED 1 (left)
2	LED 2 (right)	LED 2 (right)	LED 2 (right)
3		LED 3 (left)	LED 3 (left)
4		LED 4 (right)	LED 4 (right)
5			LED 5 (left)
6			LED 6 (right)
7			LED 7 (left)
8			LED 8 (right)
+	Push-button: reference potential is plus		
-	LED: reference potential is GND		
9	Button 1 (left)	Button 1 (left)	Button 1 (left)
10	Button 2 (right)	Button 2 (right)	Button 2 (right)
11		Button 3 (left)	Button 3 (left)
12		Button 4 (right)	Button 4 (right)
13			Button 5 (left)
14			Button 6 (right)
15			Button 7 (left)
16			Button 8 (right)
17	Temperature sensor (PT1000)		
18	Temperature sensor (PT1000)		

- Connecting the push-button sensor (c) according to (Figure 3)
- i** An integrated resistance protects the push-button contacts against short-circuits up to a voltage of 24 V.
- Pull off start-up rockers from push-button sensor.
- i** The push-button sensor is delivered with start-up rockers. The operating rockers suitable for the push-button sensor must be ordered separately (see accessories).
- Attach push-button sensor (c) onto the supporting frame (e).

- Screw push-button sensor (c) with the integrated locking screws (d) onto supporting frame. Connection torque max. 0.8 Nm.
- Optional: Cover up the locking screws (d) with the labels supplied with the rocker set (only for the 2-gang and 4-gang device variants).
- Snap on operating rockers (a).
Device is ready for operation.

Temperature measurement

The push-button sensor includes a PT1000 (class B) resistance for room temperature measurement. The resistance is designed for a maximum current of 0.3 mA. Suitable, standard transducers are available for evaluation.

The diagram (Figure 4) shows the resistance values for the temperature range from 0 °C to 40 °C.

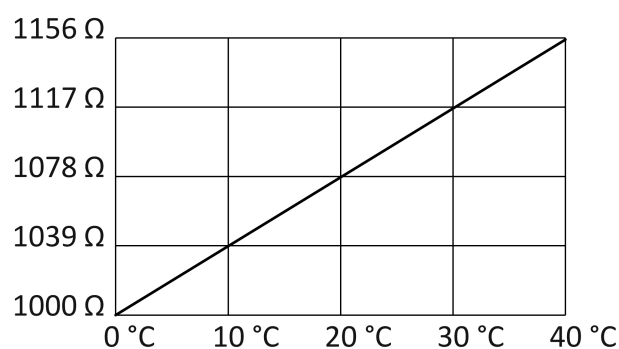



Figure 4: PT1000 characteristic curve

6 Technical data

Push-button	
Rated voltage	AC/DC 24 V SELV
Current carrying capacity	max. 20 mA per push-button
Output resistance	880 Ω
LED	
Rated voltage	DC 24 V SELV
Current consumption	approx. 1 mA per LED
Temperature sensor	
Type	PT1000, class B
Input current	max. 0.3 mA
Connection	
single stranded	0.2 ... 1.5 mm ²
Finely stranded without conductor sleeve	0.2 ... 1.5 mm ²
Ambient temperature	-5 ... +45 °C
Storage/transport temperature	-25 ... +70 °C
Protection class	III

7 Accessories

-  Individually labelled rocker sets are available from the Gira inscription service www.beschriftung.gira.de.

Rocker set, 1-gang for pushbutton sensor 4	Order no. 5021 ..
Rocker set, 1-gang, inscribable, for pushbutton sensor 4	Order no. 5031 ..
Rocker set, 2-gang for pushbutton sensor 4	Order no. 5022 ..
Rocker set, 2-gang, inscribable, for pushbutton sensor 4	Order no. 5032 ..
Rocker set, 4-gang for pushbutton sensor 4	Order no. 5024 ..
Rocker set, 4-gang, inscribable, for pushbutton sensor 4	Order no. 5034 ..

8 Warranty

The warranty is provided in accordance with statutory requirements via the specialist trade. Please submit or send faulty devices postage paid together with an error description to your responsible salesperson (specialist trade/installation company/electrical specialist trade). They will forward the devices to the Gira Service Center.

Gira
Giersiepen GmbH & Co. KG
Elektro-Installations-
Systeme

Industriegebiet Mermbach
Dahlienstraße
42477 Radevormwald

Postfach 12 20
42461 Radevormwald

Deutschland

Tel +49(0)21 95 - 602-0
Fax +49(0)21 95 - 602-191

www.gira.de
info@gira.de